


ROOFGRIP® HRG100

Head Style	P3 Oval Head
Diameter	6.3mm (Buildex Screw size 14)
Build-Up Range	68mm – 85mm
Steel Thickness	0.7mm – 1.2mm
Timber	Penetrate through timber by 15mm Thicker timber, 38mm Embedment
Concrete	5.5mm Pilot Hole Required
Total Length	100mm
Teks Drill Point	X Point
Thread Type	Modified Butress
Coating	Climaseal®
Box Quantity	1000
Euro Code	921168



In Metal	Recommended Loads				
Steel Thickness	1.2mm	0.9mm	0.75mm	0.61mm	0.45mm
KN	1.35KN	1.02KN	0.78KN	0.61KN	0.41KN
In Plywood	Recommended Loads				
Thickness	9MM		13mm	19mm	
KN	0.48KN		0.64KN	1.07KN	
In Wood Plank	Recommended Loads				
Depth	26mm		32mm	38mm	
KN	0.87KN		1.34KN	1.62KN	
In Concrete	C20/C25 Concrete Recommended Loads				
Depth	26mm		38mm	50mm	
KN	1.24KN		2.04KN	3.27KN	

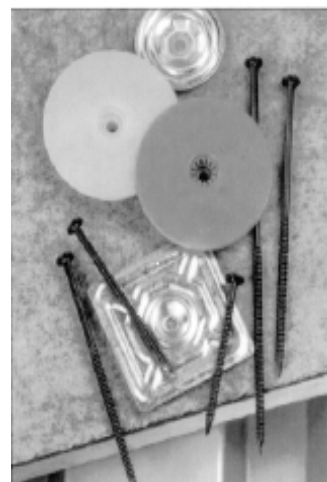