



MAXISEAL® MXC26

Head Style	5/16 th HEX Head
Diameter	5.5mm (Buildex Screw size 12)
Effective Thread Length	15mm
Steel Thickness	1.2mm – 5mm
Total Length	26mm
Teks Drill Point	3
Thread Type	Spaced (14)
Coating	Climaseal®

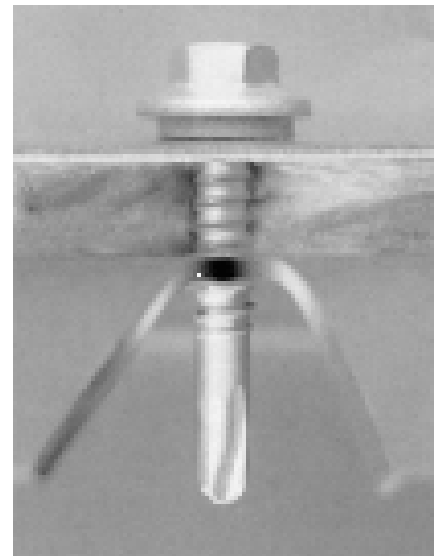

Box Quantity	250
Euro Code	920023

Maxiseal Head



Recommended Pull Out values (Tensile)

STEEL THICKNESS MM							
1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00
0.80KN	1.11KN	1.56KN	2.39KN	2.38KN	3.34KN	4.30KN	*

Recommended Shear Values

STEEL THICKNESS MM							
1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00
2.00KN	2.38KN	2.89KN	2.91KN	2.91KN	2.91KN	2.91KN	*

Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
12.63KN	9.09KN	0.42KN

