


MAXISEAL® MXC32

| | |
|--------------------------------|--------------------------------------|
| Head Style | 5/16th HEX Head |
| Diameter | 5.5mm (Buildex Screw size 12) |
| Effective Thread Length | 18mm |
| Steel Thickness | 1.2mm – 5mm |
| Total Length | 32mm |
| Teks Drill Point | 3 |
| Thread Type | Spaced (14) |
| Coating | Climaseal® |

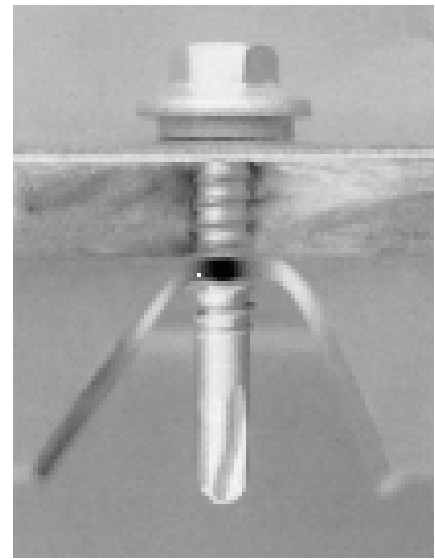

| | |
|---------------------|---------------|
| Box Quantity | 250 |
| Euro Code | 920024 |

Maxiseal Head



Recommended Pull Out values (Tensile)

| STEEL THICKNESS MM | | | | | | | |
|--------------------|--------|--------|--------|--------|--------|--------|------|
| 1.20 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 6.00 |
| 0.80KN | 1.11KN | 1.56KN | 2.39KN | 2.38KN | 3.34KN | 4.30KN | * |

Recommended Shear Values

| STEEL THICKNESS MM | | | | | | | |
|--------------------|--------|--------|--------|--------|--------|--------|------|
| 1.20 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 6.00 |
| 2.00KN | 2.38KN | 2.89KN | 2.91KN | 2.91KN | 2.91KN | 2.91KN | * |

Ultimate Fastener Values

| Tensile | Shear (Average KN) | MIN Torque |
|---------|--------------------|------------|
| 12.63KN | 9.09KN | 0.42KN |

