


# MAXISEAL® MXL38

<b>Head Style</b>	<b>5/16<sup>th</sup> HEX Head</b>
<b>Diameter</b>	<b>5.5mm (Buildex Screw size 12)</b>
<b>Effective Thread Length</b>	<b>16mm</b>
<b>Steel Thickness</b>	<b>4mm – 12.5mm</b>
<b>Total Length</b>	<b>38mm</b>
<b>Teks Drill Point</b>	<b>5</b>
<b>Thread Type</b>	<b>Fine (24)</b>
<b>Coating</b>	<b>Climaseal®</b>
<b>Box Quantity</b>	<b>200</b>
<b>Euro Code</b>	<b>921183</b>

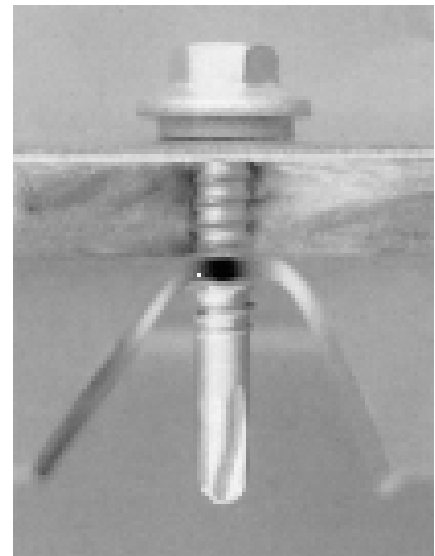

## Recommended Pull Out values (Tensile)

STEEL THICKNESS MM		
4mm	5mm	6mm -12.5mm
3.20KN	5.43KN	5.86KN

## Recommended Shear Values

STEEL THICKNESS MM		
4mm	5mm	6mm – 12.5mm
3.86KN	3.96KN	4.05KN

## Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
14.49KN	10KN	0.68KN

