


ROOFGRIP® RG

Head Style	P3 Oval Head
Diameter	5.5mm (Buildex Screw size 12)
Lengths	41mm – 202mm
Steel Thickness	0.7mm - 1.2mm
Timber	Penetrate through timber by 15mm Thicker timber, 38mm Embedment
Teks Drill Point	X Point
Thread Type	Modified Butress
Coating	Climaseal®
Box Quantity	200

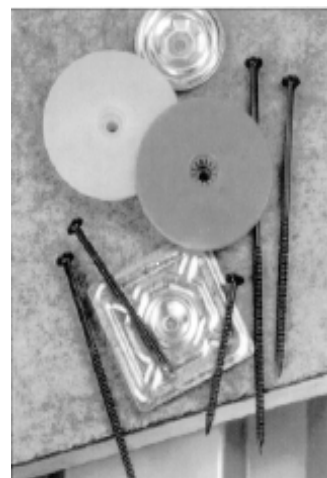

Recommended Pull Out values

In Metal					
Steel Thickness	1.2mm	0.9mm	0.75mm	0.61mm	0.45mm
KN	1.31	0.96	0.72	*	*
In Plywood					
Timber Thickness	10mm		13mm	19mm	
KN	0.29KN		0.48KN	0.80KN	
In Wood Plank					
Depth	26mm		32mm	38mm	
KN	1.16KN		1.59KN	1.89KN	

Ultimate Fastener Values

Tensile	Shear (Average KN)
11.65KN	5.90KN