


# TEKS® TC16

<b>Head Style</b>	<b>5/16<sup>th</sup> AF HEX</b>
<b>Diameter</b>	<b>4.8mm (Buildex Screw size 10)</b>
<b>Effective Thread Length</b>	<b>6mm</b>
<b>Steel Thickness</b>	<b>1.2mm – 3.0mm</b>
<b>Total Length</b>	<b>16mm</b>
<b>Teks Drill Point</b>	<b>3</b>
<b>Thread Type</b>	<b>Spaced</b>
<b>Coating</b>	<b>Climaseal®</b>
<b>Box Quantity</b>	<b>500</b>
<b>Euro Code</b>	<b>920027</b>

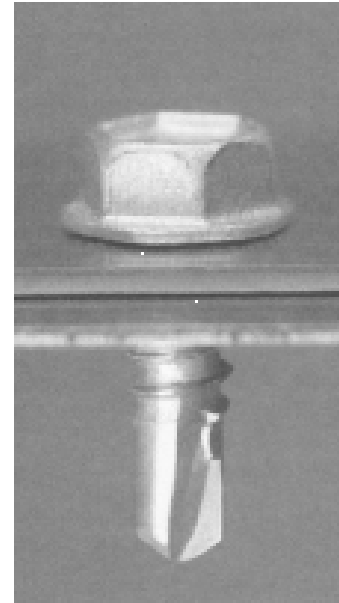

## Recommended Pull Out values (Tensile)

STEEL THICKNESS MM				
0.90	1.20	1.50	2.00	2.50
0.44KN	0.73KN	1.04KN	1.42KN	2.16KN

## Recommended Shear Values

STEEL THICKNESS MM			
0.91	1.20	1.50	2.00
1.07KN	2.13KN	2.26KN	2.28KN

## Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
8.8KN	6.36KN	0.28KN