



TEKS® TFC120

| | |
|------------------|-------------------------------|
| Head Style | P3 Wafer |
| Diameter | 5.5mm (Buildex Screw size 12) |
| Timber Thickness | 40mm – 100mm |
| Steel Thickness | 1.5mm – 5.00mm |
| Total Length | 120mm |
| Teks Drill Point | 3 |
| Thread Type | Spaced |
| Coating | Climaseal® |

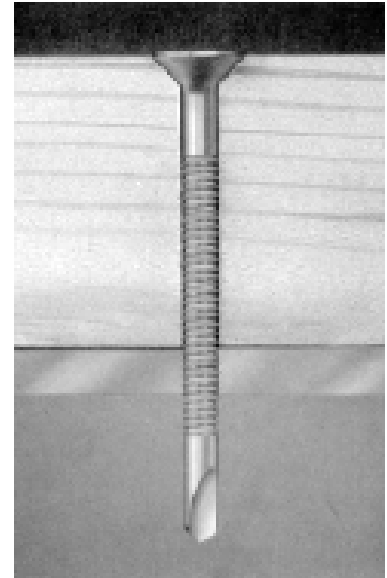

| | |
|--------------|--------|
| Box Quantity | 100 |
| Euro Code | 921293 |



Recommended Pull Out values (Tensile)

| STEEL THICKNESS MM | | | | | |
|--------------------|--------|--------|--------|--------|--------|
| 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 |
| 1.11KN | 1.56KN | 2.39KN | 2.38KN | 3.34KN | 4.30KN |

Recommended Shear Values

| STEEL THICKNESS MM | | | | | |
|--------------------|--------|--------|--------|--------|--------|
| 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 |
| 2.38KN | 2.89KN | 2.93KN | 2.93KN | 2.93KN | 2.93KN |

Ultimate Fastener Values

| Tensile | Shear (Average KN) |
|---------|--------------------|
| 12.63KN | 9.09KN |