



TEKS® TFC38

Head Style	P2 Countersunk
Diameter	4.8mm (Buildex Screw size 10)
Timber Thickness	6mm – 22mm
Steel Thickness	0.9mm – 3.0mm
Total Length	38mm
Teks Drill Point	3
Thread Type	Spaced
Coating	Climaseal®

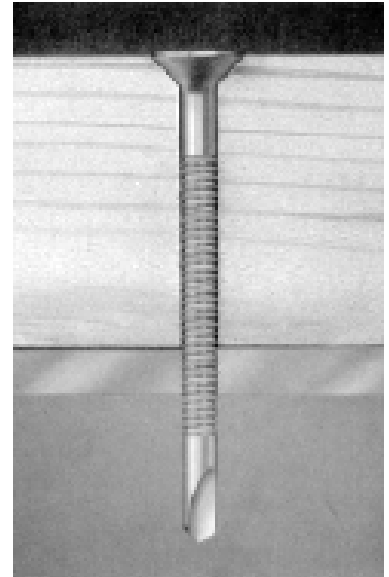

Box Quantity	100
Euro Code	921294



Head P2 Diameter 8mm
 Shank 3.5mm
 Outside thread 4.8mm
 Thread Length 23mm
 Wings 6mm

Recommended Pull Out values (Tensile)

STEEL THICKNESS MM				
0.90	1.20	1.50	2.00	2.50
0.44KN	0.73KN	1.04KN	1.42KN	2.16KN

Recommended Shear Values

STEEL THICKNESS MM			
0.91	1.20	1.50	2.00
1.07KN	2.13KN	2.26KN	2.28KN

Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
8.8KN	6.36KN	0.28KN