



TEKS® TFC50

Head Style	P2 Countersunk
Diameter	5.5mm (Buildex Screw size 12)
Timber Thickness	13mm – 30mm
Steel Thickness	1.2mm – 5.00mm
Total Length	50mm
Teks Drill Point	3
Thread Type	Spaced
Coating	Climaseal®

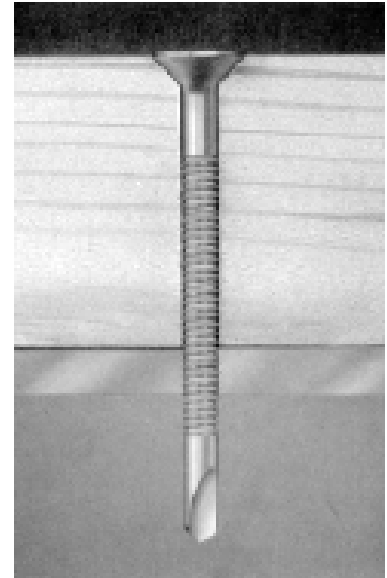

Box Quantity	100
Euro Code	921296



Recommended Pull Out values (Tensile)

STEEL THICKNESS MM							
1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00
0.80KN	1.11KN	1.56KN	2.39KN	2.88KN	3.34KN	4.30KN	*

Recommended Shear Values

STEEL THICKNESS MM							
1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00
2.00KN	2.38KN	2.89KN	2.91KN	2.91KN	2.91KN	2.91KN	*

Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
9.09KN	12.63KN	0.42KN