



TEKS® TFC61

Head Style	P2 Countersunk
Diameter	5.5mm (Buildex Screw size 12)
Timber Thickness	13mm – 40mm
Steel Thickness	1.5mm – 5.00mm
Total Length	61mm
Teks Drill Point	3
Thread Type	Spaced
Coating	Climaseal®

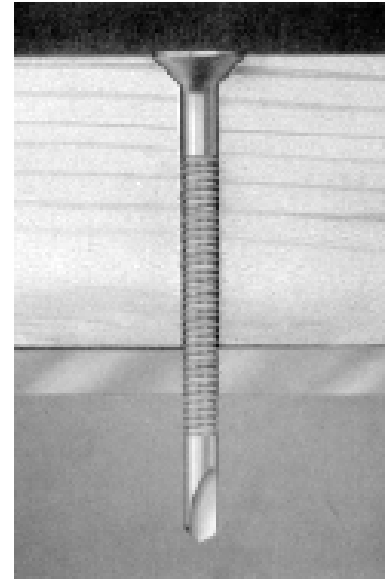

Box Quantity	100
Euro Code	921297



Recommended Pull Out values (Tensile)

STEEL THICKNESS MM					
1.50	2.00	2.50	3.00	4.00	5.00
1.11KN	1.56KN	2.39KN	2.38KN	3.34KN	4.30KN

Recommended Shear Values

STEEL THICKNESS MM					
1.50	2.00	2.50	3.00	4.00	5.00
2.38KN	2.89KN	2.93KN	2.93KN	2.93KN	2.93KN

Ultimate Fastener Values

Tensile	Shear (Average KN)
12.63KN	9.09KN