



TEKS® TFL65

Head Style	P3 Countersunk
Diameter	5.5mm (Buildex Screw size 12)
Timber Thickness	10mm – 28mm
Steel Thickness	4mm – 10.00mm
Total Length	65mm
Teks Drill Point	5
Thread Type	Fine
Coating	Climaseal®

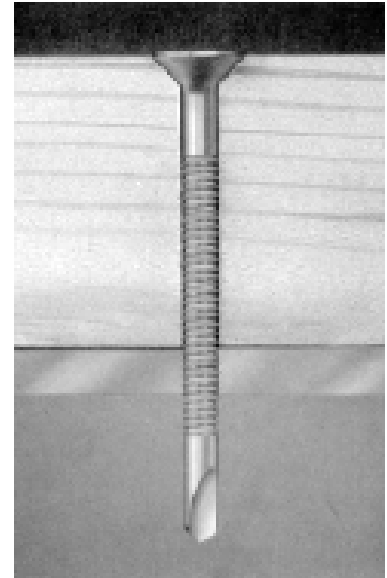

Box Quantity	100
Euro Code	921301



Recommended Pull Out values (Tensile)

STEEL THICKNESS MM		
4mm	5mm	6mm -10mm
2.24KN	5.43KN	5.86KN

Recommended Shear Values

STEEL THICKNESS MM		
4mm	5mm	6mm – 10mm
3.86KN	3.96KN	4.05KN

Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
14.49KN	10KN	0.68KN