



# TEKS® TFL80

<b>Head Style</b>	<b>P3 Countersunk</b>
<b>Diameter</b>	<b>5.5mm (Buildex Screw size 12)</b>
<b>Timber Thickness</b>	<b>10mm – 42mm</b>
<b>Steel Thickness</b>	<b>4mm – 10.00mm</b>
<b>Total Length</b>	<b>80mm</b>
<b>Teks Drill Point</b>	<b>5</b>
<b>Thread Type</b>	<b>Fine</b>
<b>Coating</b>	<b>Climaseal®</b>

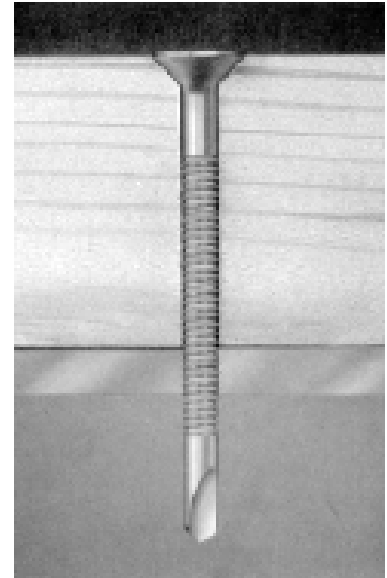

<b>Box Quantity</b>	<b>100</b>
<b>Euro Code</b>	<b>921302</b>



## Recommended Pull Out values (Tensile)

STEEL THICKNESS MM		
4mm	5mm	6mm -10mm
2.24KN	5.43KN	5.86KN

## Recommended Shear Values

STEEL THICKNESS MM		
4mm	5mm	6mm – 10mm
3.86KN	3.96KN	4.05KN

## Ultimate Fastener Values

Tensile	Shear (Average KN)	MIN Torque
14.49KN	10KN	0.68KN